

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number  
**WO 2004/086381 A1**

(51) International Patent Classification<sup>7</sup>: **G11B 7/007**

(21) International Application Number:  
PCT/IB2004/050228

(22) International Filing Date: 11 March 2004 (11.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
03100749.5 24 March 2003 (24.03.2003) EP

KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **WOERLEE, Pierre, H.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **KOPPERS, Wilhelmus, R.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **MARTENS, Hubert, C., F.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **VAN DEN OETELAAR, Ronald, J., A.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **SPRUIT, Johannes, H., M.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: **UITTENBOGAARD, Frank**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,

**Declaration under Rule 4.17:**


— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)*

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: MULTILAYER OPTICAL DISC HAVING PREGROOVE MODULATION

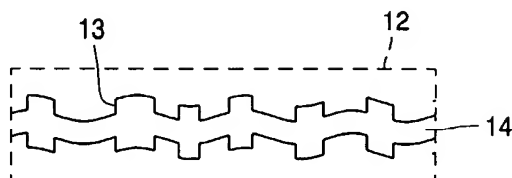

(57) Abstract: A record carrier is for recording information by writing marks in a track. The record carrier has at least a first recording layer (40) and a second recording layer (41). Each layer has a pregroove (14) indicating the position of the track and exhibiting a wobble modulated for representing physical address information. In addition the pregroove has a pregroove modulation (13) constituted by variations of a physical parameter related to the shape of the pregroove for encoding auxiliary control information. In a scanning device the pregroove modulation is detected in the

main detector signal by variations of the reflected radiation.

WO 2004/086381 A1

## Multilayer optical disc having pregroove modulation

The invention relates to a record carrier of a writable type for recording information by writing marks in a track.

The invention further relates to a device for scanning the record carrier and a method for providing information via the record carrier.

5

An optical record carrier is known from WO00/43996. The record carrier comprises a guide groove, usually called pregroove, for indicating the position of tracks in which the information is to be represented in a predefined manner by recording optically readable marks. The pregroove is meandering by a periodic excursion of the track in a direction transverse to the longitudinal scanning direction (further denoted as wobble). The wobble comprises a wobble modulation, for example by inverting wobble periods in phase according to additional information such as physical addresses or recording control information. A scanning device is provided with a head for generating a beam of radiation for scanning the track. The marks are detected during said scanning by variations of the reflectivity of the scanned surface. The variations in intensity of the reflected radiation are detected by a main detector system. Furthermore the scanning device has auxiliary detectors for generating tracking servo signals based on the pregroove for detecting a spatial deviation of the head with respect to the track. The tracking servo signals are used to control actuators to position the head on the track. The wobble modulation is detected via the auxiliary detectors and demodulated for retrieving the physical address information. A problem of the known record carrier and device is that the data capacity of the wobble modulation available for encoding control information is limited.

25

Therefore it is an object of the invention to provide a record carrier and a scanning device for accommodating additional control information at a higher data capacity.

According to a first aspect of the invention the object is achieved with a record carrier of a writable type for recording information by writing marks in a track on a

recordable area of a recording layer via a beam of radiation entering through an entrance face of the record carrier, the marks being detectable during scanning the track via the beam by a first type of variations of the radiation, the record carrier comprising at least a first recording layer and a second recording layer, the first recording layer being present at a position closer to the entrance face than the second recording layer, and at least one transparent spacer layer between the recording layers, and each layer comprising a pregroove indicating the position of the track, the pregroove exhibiting a wobble constituted by displacements of the pregroove in a direction transverse to the longitudinal direction of the track, the wobble exhibiting a wobble modulation for representing physical address information indicating the physical position of the physical address with respect to a starting point of the track and the pregroove exhibiting a pregroove modulation constituted by variations of a physical parameter related to the shape of the pregroove, the pregroove modulation representing auxiliary control information, the wobble modulation being detectable during said scanning by a second type of variations of the radiation and the pregroove modulation being detectable during said scanning by further variations of said first type.

According to a second aspect of the invention the object is achieved with a device for scanning a track on the above mentioned record carrier via a beam of radiation, the device comprising a head for providing the beam, a front-end unit for generating a scanning signal for detecting marks in the track by detecting scanning signal variations due to a first type of variations of the radiation, wobble detection means for retrieving the physical address information from the wobble modulation by detecting a second type of variations of the radiation, and pregroove demodulation means for retrieving the auxiliary control information from the pregroove modulation on the first and the second recording layer by detecting further scanning signal variations due to the first type of variations of the radiation.

The effect of the measures is that in addition to the wobble modulation a second, different modulation of the pregroove is available for accommodating auxiliary control information. This has the advantage that a relatively large capacity for storing auxiliary control data is created, e.g. around 1 bit for each wobble period. It is to be noted that traditional wobble modulation as described for example in WO00/43996 may require up to 100 wobble periods for transferring a single bit of additional control information. Hence the recording device according to the invention will read the necessary control data in a much shorter time than control data accommodated in the traditional wobble modulation, which increases the speed of a startup procedure after inserting the record carrier.

The invention is also based on the following recognition. The wobble modulation is suitable for physical address information because such address information is used for locating data sectors (to be) recorded in the track, while the wobble period itself is used for synchronization of speed of rotation and/or of the recording process. Although  
5 traditionally some additional data can be accommodated also in the wobble modulation, the need for auxiliary control information has increased greatly in modern recording systems, in particular for high density and multilayer recording systems. The inventors have seen that applying the pregroove modulation which is detectable via the main detector and scanning signal the data capacity can be increased significantly, in particular by using both recording  
10 layers.

In an embodiment of the record carrier the pregroove modulation comprises pregroove land areas of zero depth alternating with pregroove pit areas of a predefined depth and width for constituting a pattern of pregroove marks representing the auxiliary control information. This has the advantage that the pattern is produced during manufacture of the  
15 record carrier using the same production steps already used for producing the pregroove.

In an embodiment of the record carrier said marks in the track have lengths corresponding to an integer number of channel bit lengths  $T$  and the shortest marks having a length of a predefined minimum number  $d$  of channel bit lengths  $T$  for being detectable via a scanning spot having an effective diameter constituted by said beam on the track, and the  
20 pregroove modulation is constituted by a carrier pattern of long pregroove marks, the long pregroove marks having lengths of at least two times the predefined minimum number  $d$  of channel bit lengths  $T$  for being substantially longer than the effective diameter of the scanning spot. The effect of using the long pregroove marks is that a focus offset is detectable based on the maximum amplitude of the scanning signal. Advantageously  
25 adjusting the focus and retrieving the auxiliary information are based on the same area having the pregroove modulation, which increases the startup speed of a device after inserting a record carrier. Surprisingly the focus offset so detected corresponds substantially to the optimum focus offset for reducing errors during reading or recording the marks. The long pregroove marks are substantially longer than the effective diameter of the scanning spot,  
30 which effective diameter is effective for reading out marks from at least a predefined minimum size, and is usually defined as the diameter at which the intensity of radiation is down 50% of its peak value. Advantageously only the focus area having the carrier pattern of long marks is needed for maximizing the amplitude during offset adjustment.

In an embodiment of the record carrier each recording layer comprises a disc information area in which area the pregroove exhibits said pregroove modulation, the disc information area being substantially smaller than the recordable area of the recording layer, and in particular the disc information areas of the recording layers being located at  
5 corresponding radial positions. This has the advantage that disc information is available for each recording layer individually. Advantageously locating the information areas at corresponding positions reduces the read-out time of the auxiliary control information, because the read head does not need to jump radially when switching layers.

Further preferred embodiments of the record carrier and device according to  
10 the invention are given in the further claims.

These and other aspects of the invention will be apparent from and elucidated further with reference to the embodiments described by way of example in the following  
15 description and with reference to the accompanying drawings, in which

Figure 1a shows a disc-shaped record carrier (top view),

Figure 1b shows a cross-section taken of the record carrier,

Figure 1c shows an example of a wobble of the track,

Figure 1d shows a wobble having a pregroove modulation by variations of the  
20 width,

Figure 1e shows a wobble having a pregroove modulation by variations of the depth,

Figure 2 shows a scanning device having pregroove demodulation, Figure 3 shows a multilayer optical disc,

25 Figure 4 shows the focus error signal S-curve,

Figure 5 shows a modulated wobble, a pregroove modulation and a read signal,

Figure 6 shows ADIP information in wobble modulation, and

Figure 7 shows a wobble demodulation unit.

30 In the Figures, elements which correspond to elements already described have the same reference numerals.

Figure 1a shows a disc-shaped record carrier 11 having a track 9 and a central hole 10. The track 9 is arranged in accordance with a spiral pattern of turns constituting substantially parallel tracks on an information layer. The record carrier may be an optical disc having an information layer of a recordable type. Examples of a recordable disc are the CD-R and CD-RW, and the DVD+RW. The track 9 on the recordable type of record carrier is indicated by a pre-embossed track structure provided during manufacture of the blank record carrier, for example a pregroove. Recorded information is represented on the information layer by optically detectable marks recorded along the track. The marks are constituted by variations of a first physical parameter and thereby have different optical properties than their surroundings. The marks are detectable by variations in the reflected beam, e.g. variations in reflection.

Figure 1b is a cross-section taken along the line b-b of the record carrier 11 of the recordable type, in which a transparent substrate 15 is provided with a recording layer 16 and a protective layer 17. The track structure is constituted, for example, by a pregroove 14 which enables a read/write head to follow the track 9 during scanning. The pregroove 14 may be implemented as an indentation or an elevation, or may consist of a material having a different optical property than the material of the pregroove. The pregroove enables a read/write head to follow the track 9 during scanning. A track structure may also be formed by regularly spread sub-tracks which periodically cause servo signals to occur. The record carrier may be intended to carry real-time information, for example video or audio information, or other information, such as computer data.

Figure 1c shows an example of a wobble of the track. The Figure shows a periodic variation of the lateral position of the track, also called wobble. The variations cause an additional signal to arise in auxiliary detectors, e.g. in the push-pull channel generated by partial detectors in the central spot in a head of a scanning device. The wobble is, for example, frequency modulated and position information is encoded in the modulation. A comprehensive description of the prior art wobble as shown in Figure 1c in a writable CD system comprising disc information encoded in such a manner can be found in US 4,901,300 (PHN 12.398) and US 5,187,699 (PHQ 88.002).

During readout by scanning the wobble modulation is detectable via a second type of variations of the radiation, such as variation of intensity in the cross section of the reflected beam detectable by detector segments or additional detectors for generating tracking servo signals. Detecting the wobble for a tracking servo system is well known from the above mentioned CD-R and CD-RW system. The wobble modulation is used to encode physical

addresses, for example as shown in figure 6, while wobble demodulation is shown in figure 7.

User data can be recorded on the record carrier by marks having discrete lengths in unit called channel bits, for example according to the CD or DVD channel coding  
5 scheme. The marks are having lengths corresponding to an integer number of channel bit lengths T. The shortest marks that are used have a length of a predefined minimum number d of channel bit lengths T for being detectable via the scanning spot on the track that has an effective diameter, usually being roughly equal to the length of the shortest mark.

According to the invention the record carrier has an auxiliary control area 12  
10 in which the pregroove is modulated for encoding auxiliary control information. In the auxiliary control area 12 the pregroove exhibits a pregroove modulation constituted by variations of a physical parameter related to the shape of the pregroove for representing auxiliary control information. The pregroove modulation is detectable during said scanning by variations of the reflected beam similar to the variations due to the marks in the track that  
15 are detectable by variations in the reflected beam, e.g. further variations in reflection.

In an embodiment the auxiliary control area 12 is located at a predefined position on the recording layer. The predefined position is indicated schematically as a part of the track 9 by the rectangle 12 in the Figure, but in practice the auxiliary control area 12 has sufficient length for allowing the auxiliary control information to be encoded, e.g. a few  
20 windings of the track. In particular the predefined position may cover a predefined radial range to allow a device to locate the area based on the radial positioning of the optical head without the need to read the addresses in the track.

In an embodiment the auxiliary control area 12 is also arranged as a focus area provided for performing a focus adjustment procedure as discussed below for setting a best  
25 focus offset, which results in a low jitter in the read-out signal of the user data. The focus area is provided with a carrier pattern of long marks during manufacture of the record carrier. The carrier pattern is a series of prewritten marks that are long compared to the length of the shortest mark used for user data encoding for being substantially longer than the effective diameter of the scanning spot. In particular the long pregroove marks have lengths of at least  
30 two times the predefined minimum number d of channel bit lengths T. The carrier pattern may be constituted by long pregroove marks having a single length, or may be a predefined pattern using a few lengths, or may be randomly varied or may be modulated for encoding the auxiliary control information.

In an embodiment of the invention the shortest marks for recording the main information have a length of a 3 channel bit lengths, usually denoted as  $d = 3T$  or  $3I$ . For example in DVD the channel code is an RLL (2,10) code having a minimum length of  $3T$ , and a maximum length of  $11T$ , while marks of  $14T$  are used for synchronization. In such a system the long marks have at least a length of  $6T$  or  $7T$ , but preferably have lengths of at least  $8T$ . A practical single tone carrier pattern has long marks of a single size, e.g. pits and intermediate lands having a length of  $11T$ . It is noted that for a wobble corresponding to a predefined number of channel bit lengths suitable pregroove mark lengths are selected to constitute a pattern fitting that predefined number. For a wobble of 32 channel bits like in DVD+RW, a suitable length is  $8T$  pregroove pits alternating with  $8T$  pregroove lands. Suitable ranges of lengths for encoding information in the long marks are a range of  $6T$  to  $14T$ , or  $10T$  to  $12T$ .

According to the invention the pregroove is provided with a pregroove modulation constituted by variations of a physical parameter related to the shape of the pregroove as discussed below. The pregroove modulation encodes auxiliary control information such as auxiliary control information. It is noted that the auxiliary information may be used for control information that is processed in the scanning apparatus or a host computer, e.g. a code for accessing recorded information, an identifier to support copy-control, anti-piracy information and other accessing mechanisms. The control information in the additional data channel may represent a unique identification code, to protect illegal copying or a watermark. In an embodiment additional information is made available for the user. The additional information may be a software program, e.g. for processing, decompressing or editing audio or video material, or a 'freeware' type version of a software program for the user to try out the functions of said software. In an embodiment the additional information is audio or video content information, such as a trailer of a movie or an MP3 version of some audio. The user may be interested in a full version of the movie or audio. A provider may make available such full versions, e.g. via the internet, which versions can then be downloaded to the record carrier and recorded thereon. Actually retrieving and accessing the full versions from record carrier is controlled via access codes also included in the pregroove modulation. For example the provider may offer to the user the trailer of a few movies or software programs, e.g. 5, and allow the user to record only one of them. The user then pays for one movie when buying the recordable disc. Hence a content provider sells the record carrier with one or more samples of content information, and makes full versions of said samples available to a user, in particular via a network like the internet.



Figure 1d shows a wobble having a pregroove modulation by variations of the width. The Figure shows the wobbled pregroove 14 having a pregroove modulation 13. The shape of the pregroove, being the local cross-sectional shape, is changed according to an additional information signal to be encoded. Such change in shape affects the radiation  
5 reflected from the track during scanning, and can be detected thereby. As shown in the Figure the width of the pregroove is modulated according to a digital modulation pattern.

Figure 1e shows a wobble having a pregroove modulation by variations of the depth. As shown the depth is varied digitally for constituting pregroove pit areas 18 having a predefined depth and pregroove land areas 19 having a zero depth (i.e. no pregroove is  
10 present). Other variations of depth may be used instead.

For manufacture of such a record carrier a master disc is made. During the mastering process, the pregroove is written by a laser beam recorder. The wobble is made by imposing a small lateral offset of the nominal centre position of the track, and the intensity of the laser power of the mastering laser beam is further modulated to provide the pregroove  
15 shape modulation.

The pregroove (width, depth) modulation along the track is used to generate an additional data channel. The unrecorded disc (R or RW type) then contains additional mastered data, for example recording control data. The auxiliary data may be encoded using a channel code similar or equal to the channel code used to encode the main user data. This has  
20 the advantage that no additional circuitry is needed for decoding the additional data. In an embodiment a different modulation is used, i.e. a channel modulation code differing from the channel code used to encode the main user data. This allows any modulation to be used for encoding information in the pregroove that is optimized for not disturbing the other properties of the pregroove, e.g. a modulation having 'constant length pulses' encoding the  
25 additional data by the position of the pulses. Main user data, also called high-frequency data, may be superimposed on the modulated pregroove. The additional data in the pregroove can be run length-modulated, frequency-modulated, amplitude-modulated, phase-modulated, or any other modulation scheme, which ever is best to distinguish the data from superimposed high-frequency main user data.

30 In an embodiment of the record carrier of the DVD+R or +RW type the pregroove modulation is applied in a guard or buffer zone in the lead-in zone (other places could be lead out zone and middle zone in dual-layer DVD+R or dual-layer DVD+RW). The continuous pregroove is replaced by pregroove pits and lands of either a single tone or multiple tones. It is noted the ADIP information obtained from the groove is still present and

can be read. As an example a two-layer Opposite Track Path DVD+R disc is used. The pregroove pits and lands are placed in the guard zone 3 of the lead in zone of the L0 disc (closest to the laser) and in the lead out zone of the L1 layer (below the lead-in zone of the L0 disc).

5                    In an embodiment of the record carrier windings of the track having the pregroove modulation are alternated with windings of the track having no pregroove modulation or having a different, predefined pregroove modulation. By such a pattern the so-called wobble beat and/or crosstalk of adjacent grooves can be minimized.

                  Figure 2 shows a scanning device having pregroove demodulation. The device  
10    is provided with means for scanning a track on a record carrier 11 which means include a drive unit 21 for rotating the record carrier 11, a head 22, a servo unit 25 for positioning the head 22 on the track, and a control unit 20. The head 22 comprises an optical system of a known type for generating a radiation beam 24 guided through optical elements focused to a radiation spot 23 on a track of the information layer of the record carrier. The radiation beam  
15    24 is generated by a radiation source, e.g. a laser diode. The head further comprises (not shown) a focusing actuator for moving the focus of the radiation beam 24 along the optical axis of said beam and a tracking actuator for fine positioning of the spot 23 in a radial direction on the center of the track. The tracking actuator may comprise coils for radially moving an optical element or may alternatively be arranged for changing the angle of a  
20    reflecting element. The focusing and tracking actuators are driven by actuator signals from the servo unit 25. For reading the radiation reflected by the information layer is detected by a detector of a usual type, e.g. a four-quadrant diode, in the head 22 for generating detector signals coupled to a front-end unit 31 for generating various scanning signals, including a main scanning signal 33 and error signals 35 for tracking and focusing. The error signals 35  
25    are coupled to the servo unit 25 for controlling said tracking and focusing actuators. The error signals 35 are also coupled to a wobble demodulation unit 36 for retrieving the physical addresses from the wobble modulation. A detailed embodiment of wobble detection is given in Figure 7. The main scanning signal 33 is processed by read processing unit 30 of a usual type including a demodulator, deformatter and output unit to retrieve the information.

30                    The control unit 20 controls the scanning and retrieving of information and may be arranged for receiving commands from a user or from a host computer. The control unit 20 is connected via control lines 26, e.g. a system bus, to the other units in the device. The control unit 20 comprises control circuitry, for example a microprocessor, a program memory and interfaces for performing the procedures and functions as described below. The

control unit 20 may also be implemented as a state machine in logic circuits. In an embodiment the control unit performs the functions of retrieving the additional information from the pregroove via the read processing unit 30.

5 The device has a pregroove demodulation unit 32 for detecting pregroove modulation in the scanning signal as follows. The main scanning signal 33 is received from the front-end unit 31. Components in the signal 33 due to the marks of the main information are removed and components due to the marks of the pregroove modulation are isolated. In an embodiment the demodulation unit has a filter unit 34 that has a low pass or band pass function specifically tuned to the long marks. Auxiliary control information is retrieved from 10 the pregroove modulation by the pregroove demodulation unit 32. Timing recovery for reconstructing a data clock of the auxiliary signal can be based on the wobble frequency or on the pregroove modulation itself. In an embodiment timing recovery is based on the data clock retrieved for the main data. Synchronous detection can be applied for detecting the data bits of the auxiliary data. In an embodiment the pregroove modulation is provided with a 15 channel code and/or error correction codes different from the channel codes used in the user data, and the demodulation unit 34 is provided with a dedicated channel code demodulator and/or error correction unit

In an embodiment the device is provided with recording means for recording information on a record carrier of a writable or re-writable type, for example CD-R or CD- 20 RW, or DVD+RW or BD. The recording means cooperate with the head 22 and front-end unit 31 for generating a write beam of radiation, and comprise write processing means for processing the input information to generate a write signal to drive the head 22, which write processing means comprise an input unit 27, a formatter 28 and a modulator 29. For writing information the beam of radiation is controlled to create optically detectable marks in the 25 recording layer. The marks may be in any optically readable form, e.g. in the form of areas with a reflection coefficient different from their surroundings, obtained when recording in materials such as dye, alloy or phase change material, or in the form of areas with a direction of polarization different from their surroundings, obtained when recording in magneto-optical material.

30 Writing and reading of information for recording on optical disks and formatting, error correcting and channel coding rules are well-known in the art, e.g. from the CD or DVD system. In an embodiment the input unit 27 comprises compression means for input signals such as analog audio and/or video, or digital uncompressed audio/video. Suitable compression means are described for video in the MPEG standards, MPEG-1 is

defined in ISO/IEC 11172 and MPEG-2 is defined in ISO/IEC 13818. The input signal may alternatively be already encoded according to such standards.

Figure 3 shows a multilayer optical disc. L0 is a first recording layer 40 and L1 is a second recording layer 41. A first transparent layer 43 covers the first recording layer, a spacer layer 42 separates both recording layers 40,41 and a substrate layer 44 is shown below the second recording layer 41. The first recording layer 40 is located at a position closer to an entrance face 47 of the record carrier than the second recording layer 41. A laser beam is shown in a first state 45 focused on the L0 layer and the laser beam is shown in a second state 46 focused at the L1 layer. Each recording layer has the pattern of pregroove marks that encodes auxiliary control information.

Multilayer discs are already available as read-only pre-recorded discs, such as DVD-ROM or DVD-Video. A dual layer DVD+R disc has recently been suggested, which disc should preferably be compatible with the dual layer DVD-ROM standard. The reflection levels of both layers are  $>18\%$ . The L0 layer has a transmission around 50-70 %. A spacer layer separates the layers with a typical thickness between 30 and 60  $\mu\text{m}$ . The L1 layer has a high reflection and needs to be very sensitive. Also rewritable dual-layer discs are proposed. The L0 layer has a transmission around 40-60 %. The effective reflection of both layers is typically 7% although lower and higher values are possible (3% - 18%). Writable and rewritable optical storage media having 3 or more recording layers are considered also.

Figure 4 shows the focus error signal S-curve. The focus error signal 48 is shown for a focus varied from below to above a recording layer. For example in single layer +RW and ROM, the optimal focus-offset is found by keeping the focus-error at the zero crossing 49 of the S-curve. Additional fine-tuning may be provided by optimizing on pre-recorded data (in the case of the ROM disc). In dual layer DVD-ROM (DVD-9), the optimal focus-offset is found by keeping the focus-error at the zero crossing of the S-curve and then further optimizing on jitter. Here, the optimal focus-offset suffers from stray light from the other out-of focus layer and/or and from optical aberrations due to the non-ideal depth of the in-focus layer but this can be compensated by optimizing on jitter. In dual layer DVD+R/+RW no pre-recorded data is available to optimize the jitter values.

In an embodiment the device has a focus adjustment function included in the focus servo unit 25. First a focus area constituted by an area of the pregroove having the pregroove modulation is detected. Then the best focus is detected by scanning the carrier pattern in the focus area and monitoring the amplitude of the scanning signal due to said long marks. In particular a maximum of the amplitude is found by varying the focus offset. The

focus adjustment unit may also be implemented as a software function in the control unit 20, using the read circuitry available in the read unit 30 for detecting the amplitude of the signal due to the long pregroove marks. In an embodiment the focus adjustment function is performed for a multilayer disc for each of the relevant layers separately. The focus area on the respective layer is located, and the further steps are performed as indicated above for the first layer. Finding the right focus offset is important for writing recordable and rewritable discs. With a non-optimal focus offset the data is written on the disc in a non-optimal manner, leading to increased write power and jitter values (especially during read out).

Figure 5 shows a modulated wobble, a pregroove modulation and a read signal. The x-axis shows time and the y-axis shows the signal values. An upper curve 51 shows the wobble as a signal deviating in a radial direction from a nominal zero position. The phase of the wobble is modulated for encoding physical addresses as indicated by the phase reversal 52. The wobble modulation represents physical address information indicating the physical position of the respective physical address with respect to a starting point of the track. The wobble modulation is known for example from DV+RW and is described in detail in WO00/43996. According to the invention the pregroove constituting the wobble is modulated by alternating pregroove land areas 53 and pregroove pit areas 54. The lower curve 56 shows the resulting read signal usually called central aperture (CA) signal generated by a detector in the read head. The signal is caused by the difference in reflection of pregroove pits (groove reflection level) and pregroove lands (mirror type reflection level). The signal is comparable to the difference in reflection between a groove and a mirror area on the disc (typically 10-15% of the reflection level). Alternatively other methods can be employed for read out, e.g. radial and tangential push pull. It is noted that the wobble period or modulation cannot be detected from the CA read signal, but the pregroove land areas 53 result in pulses 55 in the CA signal, while the intermediate signal parts 57 are interpreted as being due to pregroove pits. Demodulating the pregroove signal elements 55, 57 due to the pregroove modulation is relatively straightforward. In an embodiment the pregroove signal elements are directly linked to the wobble PLL clock. Simple filtering and threshold detection can be employed. When the pits are large ( $> 8T$ ), inter symbol interference is negligible and the frequency and the magnitude of the signal are fixed. Channel bits demodulated from the signal are decoded to the auxiliary information according to a channel coding algorithm, for example the same channel coding as used for the main data in the CD or DVD system. In an embodiment a dedicated channel coding algorithm is used for

encoding the auxiliary information in the pregroove land and pit areas, which algorithm for example only uses pregroove mark lengths of 10 to 14 channel bits.

In an embodiment the pregroove modulation is aligned with the wobble modulation. As shown in figure 5 the pregroove pit and land areas are aligned to the sine wave shape of the wobble. The lengths of the pregroove marks are selected to allow pregroove modulation patterns that fit within the lengths of the wobble period. Alternatively the pregroove modulation is aligned to wobble parts that constitute critical elements of the wobble modulation like the phase reversal 52, in particular such critical wobble parts not containing pregroove modulation.

Figure 6 shows ADIP information in wobble modulation. The wobble modulation encodes additional information that is called Address In Pregroove (ADIP) in the DVD+RW system. Each ADIP bit 65 is constituted by ADIP bit sync (one wobble period 64 corresponding to 32 channel bits), followed by a ADIP word sync field (3 wobble periods) and the ADIP Data-bit field of 4 wobble periods, followed finally by 85 monotone (i.e. not modulated) wobble periods. The Figure shows a first wobble 61 which is encoded as an ADIP word sync, in which the word sync field has inverted wobbles and the data-bit field has non modulated wobbles. Second wobble 62 encode a data bit value 0 and third wobble 63 encodes a data bit of value 1.

Figure 7 shows a wobble demodulation unit. The input unit 71 provides a push-pull signal derived from the head scanning the track. A filter 72 filters the signal by high pass and low pass filters for isolating the wobble frequency and generating a wobble signal. A phase locked loop 73 is locked to the wobble frequency, and generates via a 32x multiplier 75 the synchronous write clock for recording marks in units of channel bits. A synchronous wobble unit 74 provides a wobble clock period to multiplier 76 which also receives the wobble signal. The output of the multiplier 76 is integrated in integrate and dump unit 77, of which the output is samples via a sample switch to a sync threshold detector 78 coupled to a ADIP bit synchronizer that detects the ADIP bit syncs. A second multiplier 81 is provided with a 4 wobble period signal having two inverted and two non inverted wobbles and the wobble signal on a second input for synchronous detection over 4 wobble periods. A second integrate and dump unit 82 integrates output signal of the multiplier 82, while a bit value threshold detector 83 for detecting the values of the encoded bits.

Although the invention has been mainly explained by embodiments using optical discs based on change of reflection, the invention is also suitable for other record carriers such as rectangular optical cards, magneto-optical discs or any other type of

information storage system that has a pre-applied pattern on a writable record carrier. It is noted, that in this document the word 'comprising' does not exclude the presence of other elements or steps than those listed and the word 'a' or 'an' preceding an element does not exclude the presence of a plurality of such elements, that any reference signs do not limit the scope of the claims, that the invention may be implemented by means of both hardware and software, and that several 'means' or 'units' may be represented by the same item of hardware or software. Further, the scope of the invention is not limited to the embodiments, and the invention lies in each and every novel feature or combination of features described above.

## CLAIMS:

1. Record carrier of a writable type for recording information by writing marks in a track on a recordable area of a recording layer via a beam of radiation entering through an entrance face of the record carrier, the marks being detectable during scanning the track via the beam by a first type of variations of the radiation, the record carrier comprising
  - 5 - at least a first recording layer (40) and a second recording layer (41), the first recording layer being present at a position closer to the entrance face than the second recording layer, and
  - at least one transparent spacer layer (42) between the recording layers, and
  - each layer comprising a pregroove (14) indicating the position of the track, the pregroove
  - 10 exhibiting a wobble constituted by displacements of the pregroove in a direction transverse to the longitudinal direction of the track, the wobble exhibiting a wobble modulation for representing physical address information indicating the physical position of the physical address with respect to a starting point of the track and the pregroove exhibiting a pregroove modulation (13) constituted by variations of a physical parameter related to the shape of the
  - 15 pregroove, the pregroove modulation representing auxiliary control information, the wobble modulation being detectable during said scanning by a second type of variations of the radiation and the pregroove modulation being detectable during said scanning by further variations of said first type.
- 20 2. Record carrier as claimed in claim 1, wherein said first type of variations are variations of a reflection level of the track for the radiation.
3. Record carrier as claimed in claim 1, wherein the pregroove modulation is constituted by variations of the depth or width of the pregroove.
- 25 4. Record carrier as claimed in claim 3, wherein the pregroove modulation comprises pregroove land areas (19) of zero depth alternating with pregroove pit areas (18) of a predefined depth and width for constituting a pattern of pregroove marks representing the auxiliary control information.



5. Record carrier as claimed in claim 1, wherein said marks in the track have lengths corresponding to an integer number of channel bit lengths  $T$  and the shortest marks having a length of a predefined minimum number  $d$  of channel bit lengths  $T$  for being  
5 detectable via a scanning spot having an effective diameter constituted by said beam on the track, and the pregroove modulation is constituted by a carrier pattern of long pregroove marks, the long pregroove marks having lengths of at least two times the predefined minimum number  $d$  of channel bit lengths  $T$  for being substantially longer than the effective diameter of the scanning spot.
- 10 6. Record carrier as claimed in claim 5, wherein the predefined minimum number  $d$  is 3 channel bit lengths  $T$  ( $d = 3T$ ), and the long marks have lengths of at least  $6T$ , in particular the lengths being in the range of  $8T$  to  $14T$ .
- 15 7. Record carrier as claimed in claim 4 or 5, wherein the pregroove modulation is representing the auxiliary control information encoded by the pregroove marks according to a predefined channel coding algorithm, which predefined channel coding algorithm differs from a channel coding algorithm for encoding the information in the marks in the track.
- 20 8. Record carrier as claimed in claim 1, wherein the pregroove modulation is aligned with the wobble modulation.
9. Record carrier as claimed in claim 1 or 2, wherein each recording layer comprises a disc information area (12) in which area the pregroove exhibits said pregroove  
25 modulation, the disc information area being substantially smaller than the recordable area of the recording layer, and the disc information areas of the recording layers being located at substantially corresponding radial positions.
10. Device for scanning a track on a record carrier (11) via a beam of radiation  
30 (24), the track comprising marks on a recordable area of a recording layer, the beam entering through an entrance face of the record carrier and constituting a scanning spot having an effective diameter on the track, the record carrier comprising

- at least a first recording layer (40) and a second recording layer (41), the first recording layer being present at a position closer to the entrance face than the second recording layer, and
- at least one transparent spacer layer (42) between the recording layers, and
- 5 - each layer comprising a pregroove indicating the position of the track, the pregroove exhibiting a wobble constituted by displacements of the pregroove in a direction transverse to the longitudinal direction of the track, the wobble exhibiting a wobble modulation for representing physical address information indicating the physical position of the physical address with respect to a starting point of the track and the pregroove exhibiting a pregroove modulation constituted by variations of a physical parameter related to the shape of the
- 10 pregroove, the pregroove modulation representing auxiliary control information, the device comprising
  - a head (22) for providing the beam,
  - a front-end unit (31) for generating a scanning signal (33) for detecting marks in the track
  - 15 by detecting scanning signal variations due to a first type of variations of the radiation,
  - wobble detection means (36) for retrieving the physical address information from the wobble modulation by detecting a second type of variations of the radiation, and
  - pregroove demodulation means (32) for retrieving the auxiliary control information from the pregroove modulation on the first and the second recording layer by detecting further
  - 20 scanning signal variations due to the first type of variations of the radiation.

11. Device as claimed in claim 10, wherein, while on the record carrier said marks have lengths corresponding to an integer number of channel bit lengths  $T$  and the shortest marks having a length of a predefined minimum number  $d$  of channel bit lengths  $T$  for being

25 detectable via the scanning spot having the effective diameter, and the pregroove modulation is constituted by a carrier pattern of long pregroove marks, the long pregroove marks having lengths of at least two times the predefined minimum number  $d$  of channel bit lengths  $T$  for being substantially longer than the effective diameter of the scanning spot, the pregroove demodulation means (32) are arranged for detecting the further scanning signal

30 variations due to the long pregroove marks.

12. Device as claimed in claim 10 or 11, wherein the pregroove demodulation means (32) are arranged for retrieving the auxiliary control information encoded in the pregroove modulation according to a predefined channel coding algorithm, which predefined

channel coding algorithm differs from a channel coding algorithm for encoding the information in the marks in the track.

13. Device as claimed in claim 10, 11 or 12, wherein the device comprises a  
5 control unit (20) for first retrieving the auxiliary control information via the pregroove demodulation means (32) and subsequently recording the auxiliary control information in a control area of the record carrier.

1/5


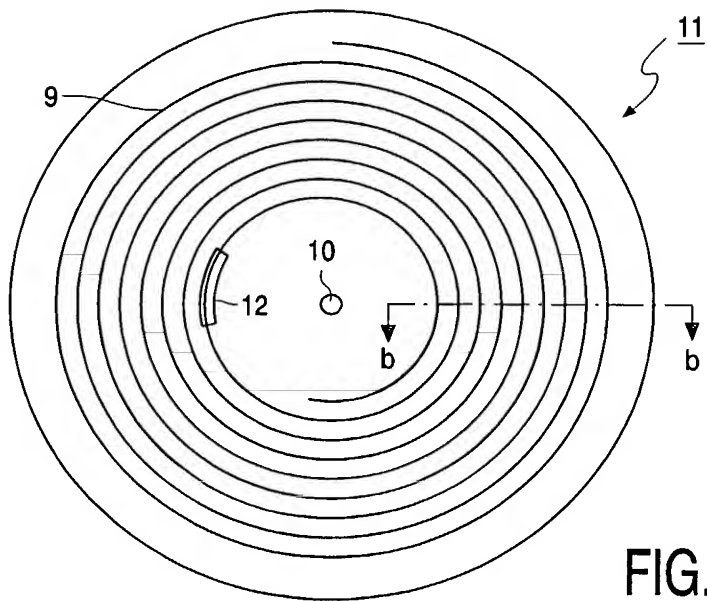


FIG. 1b

FIG. 1a




FIG. 1c

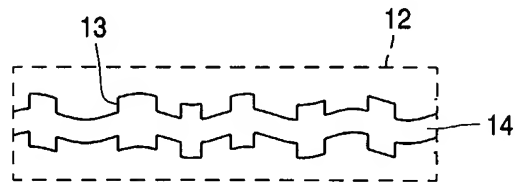


FIG. 1d

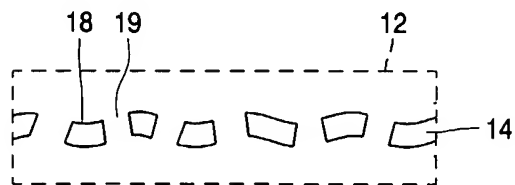


FIG. 1e

2/5

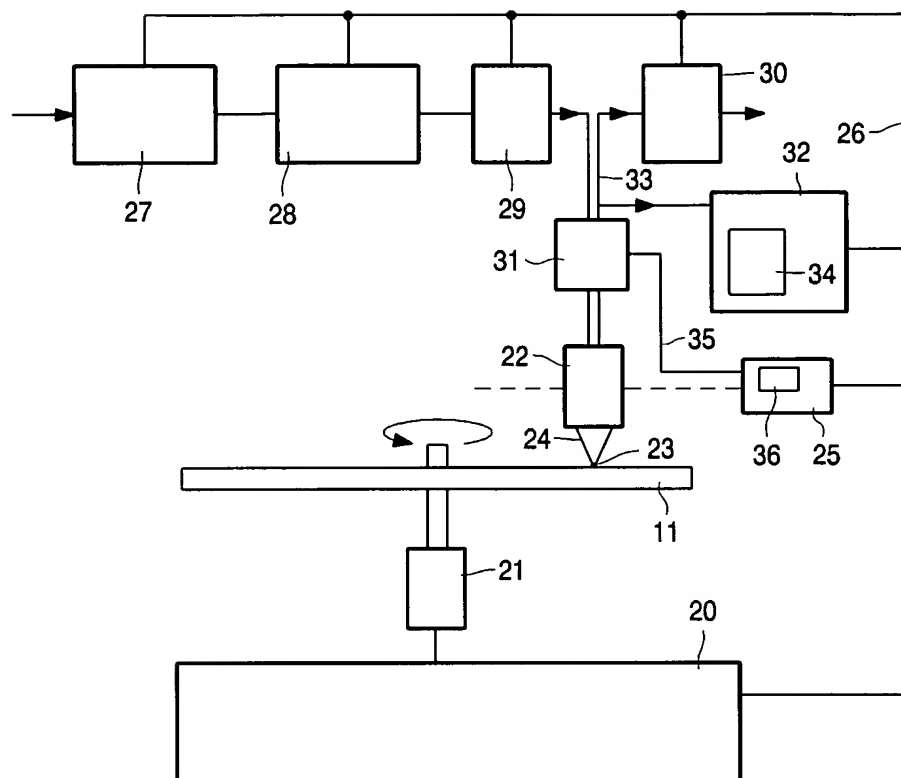


FIG. 2

3/5

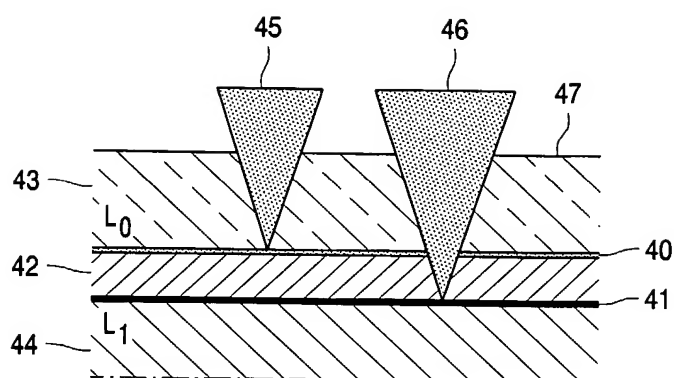


FIG. 3

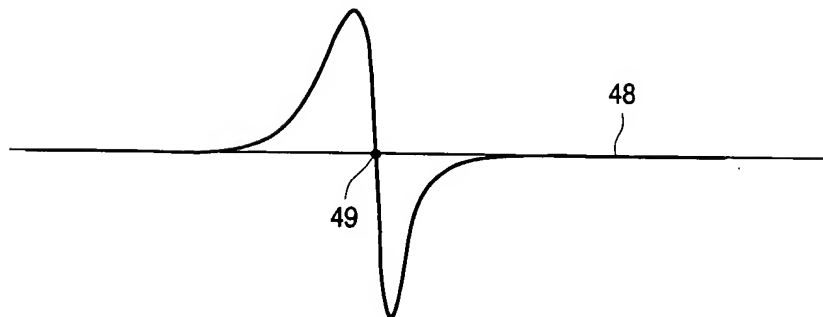


FIG. 4

4/5

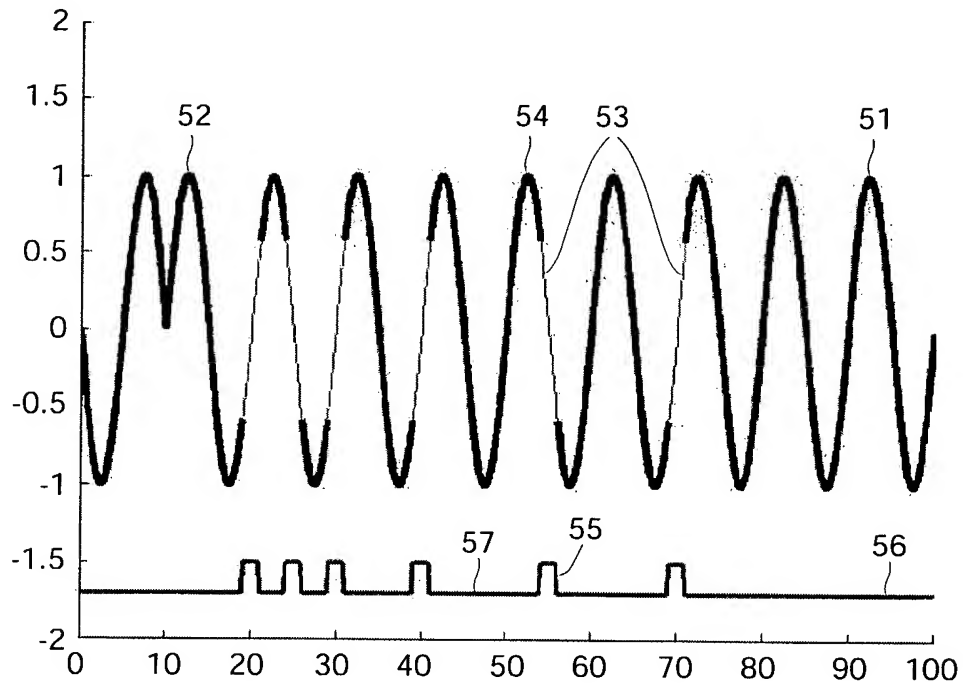


FIG. 5

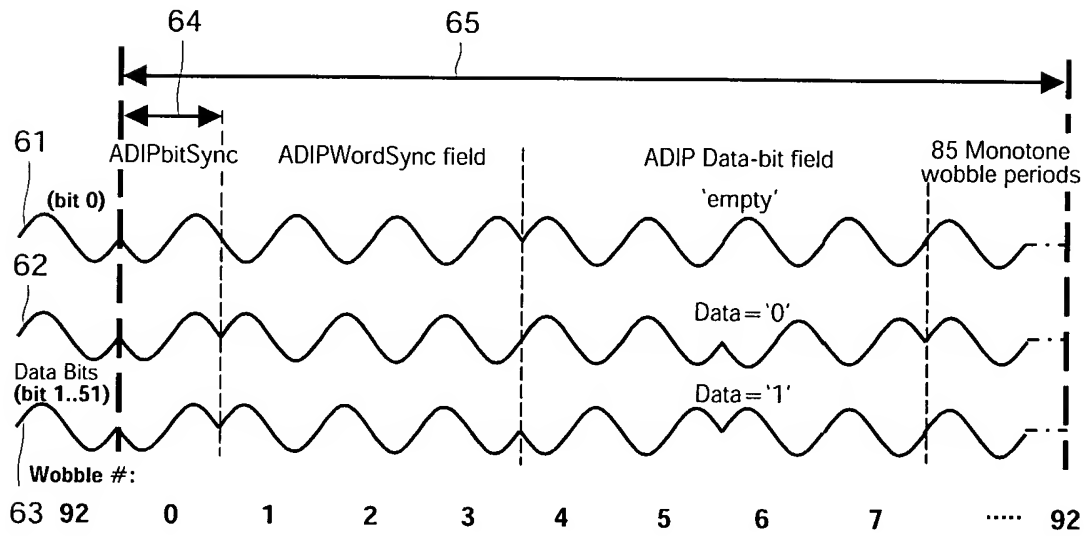


FIG. 6

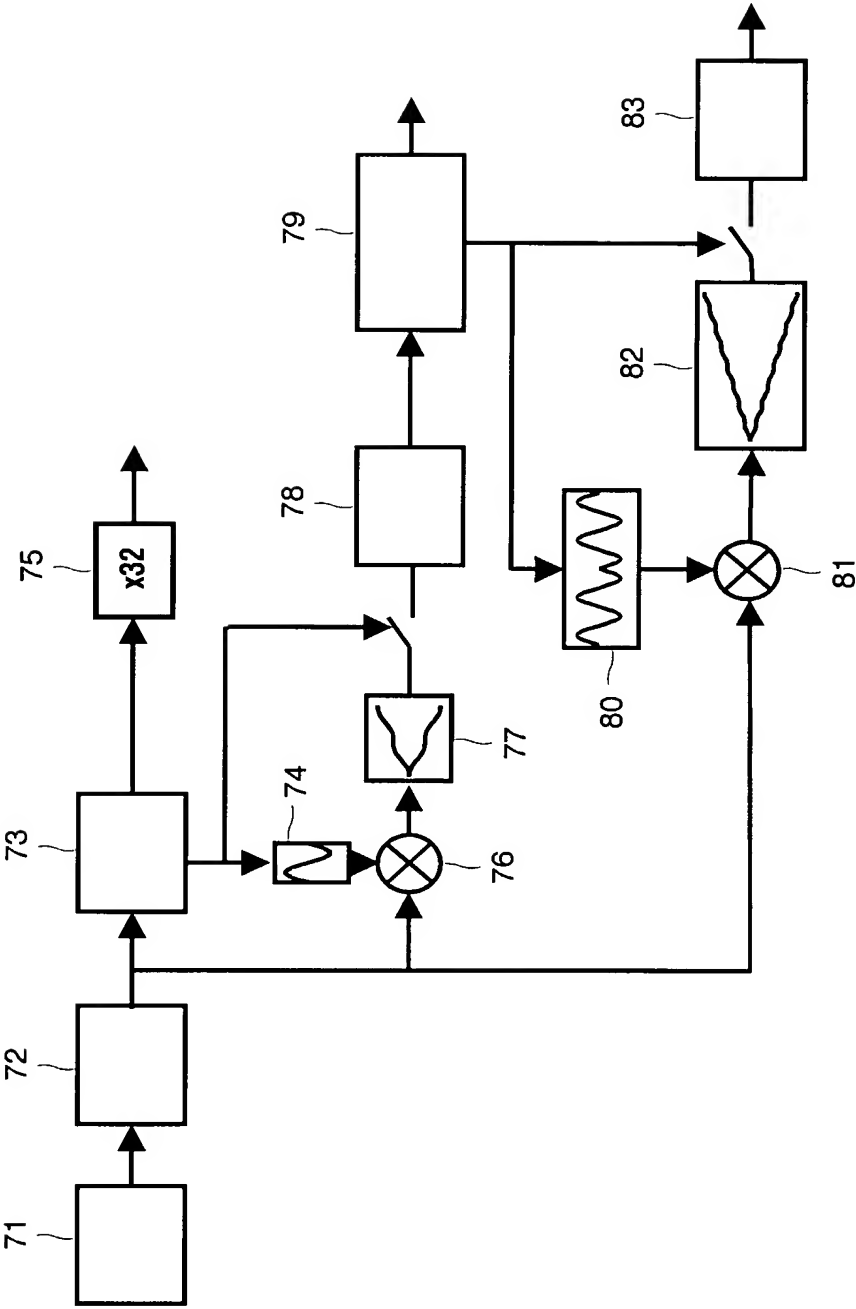


FIG.7



## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB2004/050228A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G11B7/007

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, IBM-TDB, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 291 854 A (SONY CORP) 12 March 2003 (2003-03-12) paragraph '0021! - paragraph '0058!; figures 1,5,9	1,2,8,10
Y	paragraph '0022! - paragraph '0032! -----	1-13
Y	US 2003/007432 A1 (ISHIBASHI HIROMICHI ET AL) 9 January 2003 (2003-01-09) paragraph '0134! - paragraph '0169!; figures 4,10-18 -----	1-13
Y	WO 00/43996 A (KONINKL PHILIPS ELECTRONICS NV) 27 July 2000 (2000-07-27) cited in the application page 4 - page 9; figures 1d,2 ----- -/--	1-13



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

15 July 2004

Date of mailing of the international search report

22/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Damp, S

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/IB2004/050228

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 325 330 A (PHILIPS NV) 26 July 1989 (1989-07-26) column 5 - column 17; figures 1,2,7 -----	1-13
Y	US 2002/048238 A1 (SPRUIT JOHANNES H M ET AL) 25 April 2002 (2002-04-25) paragraph '0024! - paragraph '0030!; figures 1,2 -----	1-13

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB2004/050228

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 1291854	A	12-03-2003	JP	2002260235 A	13-09-2002
			CA	2407525 A1	25-10-2002
			EP	1291854 A1	12-03-2003
			CN	1461472 T	10-12-2003
			WO	02071399 A1	12-09-2002
			US	2003169651 A1	11-09-2003
<hr/>					
US 2003007432	A1	09-01-2003	AU	8256101 A	22-03-2002
			BR	0113613 A	01-07-2003
			CA	2424008 A1	26-02-2003
			CN	1451160 T	22-10-2003
			CN	1392542 A	22-01-2003
			EP	1324320 A1	02-07-2003
			EP	1271489 A2	02-01-2003
			WO	0221518 A1	14-03-2002
			JP	3370319 B1	27-01-2003
			JP	2003099953 A	04-04-2003
			JP	3370320 B1	27-01-2003
			JP	2003099954 A	04-04-2003
			JP	3370321 B1	27-01-2003
			JP	2003099955 A	04-04-2003
			JP	3370322 B1	27-01-2003
			JP	2003099956 A	04-04-2003
			JP	2003217132 A	31-07-2003
			SK	3922003 A3	04-11-2003
			US	2003043718 A1	06-03-2003
			US	2002141317 A1	03-10-2002
			US	2002163866 A1	07-11-2002
			US	2002145947 A1	10-10-2002
			US	2002196723 A1	26-12-2002
			US	2003223347 A1	04-12-2003
			US	2004047251 A1	11-03-2004
<hr/>					
WO 0043996	A	27-07-2000	AT	254329 T	15-11-2003
			AU	766051 B2	09-10-2003
			AU	2796600 A	07-08-2000
			BR	0004371 A	19-12-2000
			CA	2325450 A1	27-07-2000
			CN	1293810 T	02-05-2001
			DE	60006454 D1	18-12-2003
			DK	1066628 T3	22-03-2004
			EA	2489 B1	27-06-2002
			EE	200000558 A	15-04-2002
			WO	0043996 A1	27-07-2000
			EP	1066628 A1	10-01-2001
			HU	0101610 A2	28-09-2001
			ID	26570 A	18-01-2001
			JP	2002535801 T	22-10-2002
			NO	20004762 A	27-10-2000
			PL	343130 A1	30-07-2001
			PT	1066628 T	31-03-2004
			TR	200002734 T1	22-01-2001
			TW	512324 B	01-12-2002
			US	2003133400 A1	17-07-2003
			US	6538982 B1	25-03-2003
			ZA	200005068 A	23-10-2001
<hr/>					
EP 0325330	A	26-07-1989	NL	8800152 A	16-08-1989

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB2004/050228

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0325330	A		AT 96935 T	15-11-1993
			BR 8900231 A	12-09-1989
			CA 1319984 C	06-07-1993
			CN 1035576 A ,B	13-09-1989
			DD 278668 A5	09-05-1990
			DD 284990 A5	28-11-1990
			DD 285657 A5	19-12-1990
			DE 68910333 D1	09-12-1993
			DE 68910333 T2	05-05-1994
			EP 0325330 A1	26-07-1989
			ES 2046441 T3	01-02-1994
			JP 1224929 A	07-09-1989
			JP 3029201 B2	04-04-2000
			KR 132674 B1	18-04-1998
			MX 174422 B	16-05-1994
			SI 8910138 A ,B	30-04-1996
			RU 2092910 C1	10-10-1997
			US 4999825 A	12-03-1991
<hr/>				
US 2002048238	A1	25-04-2002	AT 219853 T	15-07-2002
			BR 9908769 A	05-12-2000
			BR 9908776 A	28-11-2000
			CN 1301382 T	27-06-2001
			CN 1301383 T	27-06-2001
			DE 69901948 D1	01-08-2002
			DE 69901948 T2	13-02-2003
			EP 1070318 A2	24-01-2001
			EP 1070319 A2	24-01-2001
			ES 2179621 T3	16-01-2003
			HU 0101228 A2	28-08-2001
			HU 0101297 A2	28-08-2001
			WO 9948091 A2	23-09-1999
			WO 9948092 A2	23-09-1999
			JP 2002507817 T	12-03-2002
			JP 2002507818 T	12-03-2002
			PL 343558 A1	27-08-2001
			PL 343564 A1	27-08-2001
			RU 2226720 C2	10-04-2004
			TW 432373 B	01-05-2001
			US 6295270 B1	25-09-2001
			US 6269071 B1	31-07-2001
<hr/>				